



400 °C Series


Platinum sensor with wires

For medium temperatures

Benefits & Characteristics

- Outstanding long-term stability
- Excellent solderability
- Low self-heating
- Vibration and temperature shock resistant
- Paired and grouped sensors available
- 1/5 DIN and 1/10 DIN
- Customer-specific sensor available upon request

Illustration

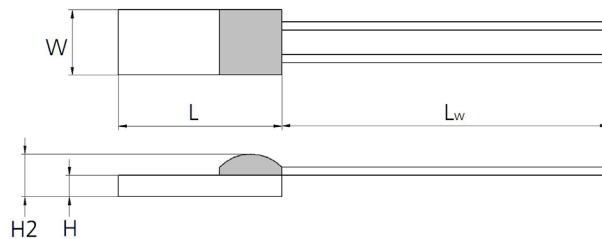

For actual size, see dimensions

Dimension tolerances: $W \pm 0.2 \text{ mm}$, $L \pm 0.2 \text{ mm}$, $H \pm 0.1 \text{ mm}$, $H2 \pm 0.3 \text{ mm}$, $L_w \text{ (up to 30 mm)} \pm 1 \text{ mm}$

Technical Data

Operating temperature range:	-200 °C to +400 °C	
Nominal resistance:*	100 Ω at 0 °C 500 Ω at 0 °C 1000 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class (dependent on temperature range):*		IST AG reference
	IEC 60751 F0.15	A
	IEC 60751 F0.3	B
	IEC 60751 F0.6	C
	IEC 60751 F0.1	Y
	1/5 IEC 60751 F0.3	K*
	1/10 IEC 60751 F0.3	K*
Connection:*	Ag-wire, Ø 0.25 mm (solderable, weldable)	
Alternative wire construction:*	Perpendicular wires Inverted wires	



Wire insulation	1) Azurro 2) P23	1.1 @ 0.65 mm blue 1.2 @ 0.65 mm green
Recommended applied current: ¹⁾ <i>¹⁾ Self-heating must be considered</i>	1 mA at 100 Ω 0.5 mA at 500 Ω 0.3 mA at 1000 Ω	
Other alternatives:*	Housed in round ceramics (for dry environments only) - see data sheet DTP_Round_Housing_E Grouped and paired Substrate thickness	

* Customer-specific alternatives available

Order Information - 4W (Ag-wire, Ø 0.25 mm)

Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)8	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6; 10.0	P0K1.161.4W.Y.010	P0K1.161.4W.A.010	P0K1.161.4W.B.010
Order code		100129	100128	100127
Former order code		010.00048	010.00045	010.00042
202	1.8 x 2.0 x 0.65 / 1.1; 7.0	Upon request	Upon request	P0K1.202.4W.B.007
Order code				101457 ¹⁾
Former order code				010.03050
216	2.4 x 1.7 x 0.65 / 1.1; 7.0	Upon request	Upon request	P0K1.216.4W.B.007
Order code				101605 ¹⁾
Former order code				010.03223
216	2.4 x 1.7 x 0.65 / 1.2; 15.0	Upon request	P0K1.216.4W.A.015	P0K1.216.4W.B.015
Order code			101217 ²⁾	101216 ²⁾
Former order code			010.02699	010.02698
232	2.2 x 2.0 x 0.65 / 1.2; 7.0	Upon request	P0K1.232.4W.A.007	P0K1.232.4W.B.007
Order code			100107 ²⁾	100106 ²⁾
Former order code			010.00008	010.00007
232	2.2 x 2.0 x 0.65 / 1.2; 10.0	P0K1.232.4W.Y.010	P0K1.232.4W.A.010	P0K1.232.4W.B.010
Order code		100105	100103 ²⁾	100101 ²⁾
Former order code		010.00006	010.00004	010.00002
505	5.0 x 5.0 x 0.65 / 1.3; 10.0	Upon request	P0K1.505.4W.A.010	P0K1.505.4W.B.010
Order code			Upon request	Upon request
Former order code			010.00141	010.00139
516	5.0 x 1.6 x 0.65 / 1.2; 10.0	P0K1.516.4W.Y.010	P0K1.516.4W.A.010	P0K1.516.4W.B.010
Order code		Upon request	Upon request	100141 ²⁾
Former order code		010.00075	010.00073	010.00071
520	5.0 x 2.0 x 0.65 / 1.2; 10.0	P0K1.520.4W.Y.010	P0K1.520.4W.A.010	P0K1.520.4W.B.010
Order code		100160	100158	100156
Former order code		010.00096	010.00094	010.00092
538	5.0 x 3.9 x 0.65 / 1.2; 10.0	Upon request	P0K1.538.4W.A.010	P0K1.538.4W.B.010
Order code			100180	100179 ²⁾
Former order code			010.00123	010.00121



Size	Dimensions (L x W x H / H ₂ ; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	POK1.102.4W.Y.010	POK1.102.4W.A.010	POK1.102.4W.B.010
Order code		100198	100196	100194 ²⁾
Former order code		010.00150	010.00148	010.00146

Nominal resistance: 150 Ω at 0 °C

202	1.8 x 2.0 x 0.65 / 1.1; 10.0	Upon request	Upon request	P150.202.4W.B.010
Order code				101548 ¹⁾
Former order code				010.03166

Nominal resistance: 350 Ω at 0 °C

202	1.8 x 2.0 x 0.65 / 1.1; 10.0	Upon request	Upon request	P350.202.4W.B.010
Order code				101549 ¹⁾
Former order code				010.03167

Nominal resistance: 500 Ω at 0 °C

161	1.6 x 1.2 x 0.25 / 0.6; 10.0	POK5.161.4W.Y.010	POK5.161.4W.A.010	POK5.161.4W.B.010
Order code		100216	100215	100214
Former order code		010.00179	010.00177	010.00175
232	2.2 x 2.0 x 0.65 / 1.2; 10.0	Upon request	POK5.232.4W.A.010	POK5.232.4W.B.010
Order code			100437	100436 ²⁾
Former order code			010.00667	010.00664
516	5.0 x 1.6 x 0.65 / 1.2; 15.0	POK5.516.4W.Y.015	POK5.516.4W.A.015	POK5.516.4W.B.015
Order code			100225	Upon request
Former order code		010.00190	010.00189 ²⁾	010.00188
520	5.0 x 2.0 x 0.65 / 1.2; 10.0	Upon request	POK5.520.4W.A.010	POK5.520.4W.B.010
Order code			100508	100435 ²⁾
Former order code			010.00946	010.00663
520	5.0 x 2.0 x 0.65 / 1.2; 15.0	POK5.520.4W.Y.015	POK5.520.4W.A.015	POK5.520.4W.B.015
Order code		100232	100231	100230 ²⁾
Former order code		010.00196	010.00195	010.00194
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	Upon request	POK5.102.4W.A.010	POK5.102.4W.B.010
Order code			101014	101019 ²⁾
Former order code			010.02332	010.02341

Nominal resistance: 1000 Ω at 0 °C

161	1.6 x 1.2 x 0.25 / 0.6; 10.0	P1K0.161.4W.Y.010	P1K0.161.4W.A.010	P1K0.161.4W.B.010
Order code		100244	100243	100242 ²⁾
Former order code		010.00217	010.00214	010.00211
232	2.2 x 2.0 x 0.65 / 1.2; 7.0	Upon request	P1K0.232.4W.A.007	P1K0.232.4W.B.007
Order code			100831	100832 ²⁾
Former order code			010.01938	010.01939



Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
232	2.2 x 2.0 x 0.65 / 1.1; 7.0	Upon request	P1K0.232.4W.A.007	P1K0.232.4W.B.007
Order code			101710 ¹⁾	101711 ¹⁾
Former order code			*010.03331	*010.03332
232	2.2 x 2.0 x 0.65 / 1.2; 10.0		P1K0.232.4W.A.010	P1K0.232.4W.B.010
Order code			101582 ¹⁾	101583 ¹⁾
Former order code			010.03200	010.03201
232	2.2 x 2.0 x 0.65 / 1.2; 10.0	P1K0.232.4W.Y.010		
Order code		100253 ²⁾		
Former order code		010.00228		
505	5.0 x 5.0 x 0.65 / 1.2; 10.0	Upon request	P1K0.505.4W.A.010	P1K0.505.4W.B.010
Order code			Upon request	100296 ²⁾
Former order code			010.00295	010.00294
516	5.0 x 1.6 x 0.65 / 1.2; 10.0	P1K0.516.4W.Y.010	P1K0.516.4W.A.010	P1K0.516.4W.B.010
Order code		100267	100265	100263 ²⁾
Former order code		010.00254	010.00252	010.00250
520	5.0 x 2.0 x 0.65 / 1.2; 10.0	P1K0.520.4W.Y.010	P1K0.520.4W.A.010	P1K0.520.4W.B.010
Order code		100276	100274	100272 ²⁾
Former order code		010.00266	010.00264	010.00262
520	5.0 x 2.0 x 0.65 / 1.3; 40.0	Upon request	Upon request	P1K0.520.4W.B.040
Order code				100331
Former order code				010.03155
520	5.0 x 2.0 x 0.65 / 1.1; 1000.0	Upon request	P1K0.520.4W.A.1000	P1K0.520.4W.B.1000
Order code			101479 ¹⁾	Upon request
Former order code			010.03074	010.03075
538	5.0 x 3.9 x 0.65 / 1.2; 10.0	Upon request	P1K0.538.4W.A.010	P1K0.538.4W.B.010
Order code			100332 ²⁾	100331
Former order code			010.00390	010.00389
102	10.0 x 2.0 x 0.65 / 1.3; 10.0	P1K0.102.4W.Y.010	P1K0.102.4W.A.010	P1K0.102.4W.B.010
Order code		100306	100303 ²⁾	100301
Former order code		010.00305	010.00301	010.00299

Order Information - 4SW (Ag-wire, Ø 0.25 mm, perpendicular wire)

Nominal resistance: 100 Ω at 0 °C

161	1.6 x 1.2 x 0.25 / 0.6; 10.0	Upon request	P0K1.161.4SW.A.010	P0K1.161.4SW.B.010
Order code			100587	100412 ²⁾
Former order code			010.01108	010.00616
232	2.2 x 2.0 x 0.65 / 1.2; 10.0	P0K1.232.4SW.Y.010	P0K1.232.4SW.A.010	P0K1.232.4SW.B.010
Order code		100930	100630	100734
Former order code		010.02159	010.01179	010.01695



Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Order code				Upon request
<i>Former order code</i>				010.02497
Nominal resistance: 500 Ω at 0 °C				
232	2.2 x 2.0 x 0.65 / 1.2; 10.0	Upon request	Upon request	POK5.232.4SW.B.010
Order code				100397
<i>Former order code</i>				010.00578
Nominal resistance: 1000 Ω at 0 °C				
161	1.6 x 1.2 x 0.25 / 0.6; 10.0	Upon request	P1K0.161.4SW.A.010	P1K0.161.4SW.B.010
Order code			100401	100327
<i>Former order code</i>			010.00599	010.00361
232	2.2 x 2.0 x 0.65 / 1.2; 15.0	Upon request	P1K0.232.4SW.A.015	P1K0.232.4SW.B.015
Order code			100399	100254
<i>Former order code</i>			010.00586	010.00235

Order Information - 308 (with Ag-wire, Ø 0.15 mm)

Nominal resistance: 100 Ω at 0 °C				
308	2.9 x 0.8 x 0.25 / 0.6; 10.0	Upon request	P0K1.308.4W.A.010	P0K1.308.4W.B.010
Order code			101533	101532
<i>Former order code</i>			010.03150	010.03149
308	3.0 x 0.8 x 0.25 / 0.6; 18.0	Upon request	P0K1.308.4W.A.018	P0K1.308.4W.B.018
			upon request	upon request
<i>Former order code</i>			010.03157	010.03151 ¹⁾
Nominal resistance: 1000 Ω at 0 °C				
308	2.9 x 0.8 x 0.25 / 0.6; 10.0	Upon request	P1K0.308.4W.A.010	P1K0.308.4W.B.010
Order code			101529	101528
<i>Former order code</i>			010.03146	010.03145
308	2.9 x 0.8 x 0.25 / 0.6; 60.0	Upon request	P1K0.308.4W.A.060	P1K0.308.4W.B.060
Order code			101531	101530
<i>Former order code</i>			010.03148	010.03147

Order Information - 308 (with FKS-wire, Ø 0.15 mm, suitable for Ø 1.0 mm)

Nominal resistance: 100 Ω at 0 °C				
308	2.9 x 0.8 x 0.25 / 0.6; 10.0	P0K1.308.4W.Y.010.S		P0K1.308.4W.B.010.S
Order code		101547		upon request
<i>Former order code</i>		010.03165		310.01025

Additional Documents

Application Note	Document name: ATP_E
------------------	-------------------------



Order Information

Platinum Sensor

Secondary reference

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C 6 = -200 °C to +600 °C
2 = -50 °C to +200 °C 7 = -200 °C to +750 °C
3 = -200 °C to +300 °C 8 = -200 °C to +850 °C
4 = -200 °C to +400 °C 10 = -70 °C to +1000 °C

Connections

S = SIL FK = flat wire customer-specific
I = insulated wire SW = perpendicular wire
K = customer-specific L = insulate stranded wire
W = wire E = enameled Cu-wire
FW = flat wire

Tolerance class

A = IEC 60751 F0.15 K = customer-specific
B = IEC 60751 F0.3 P = pair
C = IEC 60751 F0.6 G = group
Y = IEC 60751 F0.1

Wire length in mm

Special

T = substrate thickness 0.25 mm M = metallized backside
D = substrate thickness 0.38 mm U = inverted welding
R = round housing S = special
W = sintered powder

P OK1. 308. 4 W. B. 010. S



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved